



Utilizing the latest infrared gas detection technology in a robust and reliable design, the Gasurveyor 700 (GS700) is a highly configurable instrument with leading performance and a user-friendly interface which makes it the perfect choice for all gas utility applications.

### Ensuring Compliance

Intelligent data-logging functionality together with optional GPS mapping simplifies data gathering. Our Instrument Management System improves fleet management by providing access to field usage reports, calibration history, investigation mapping and many other bespoke reports; making it easier for our customers to demonstrate compliance.

### ADDITIONAL FEATURES:

- ✓ LEL & Volume Gas (infrared)
- ✓ Optional sensors including: PPM, O<sub>2</sub>, CO, H<sub>2</sub>S
- ✓ Barhole Mode - configurable
- ✓ Soft-key Operation
- ✓ Communication: IrDA & Bluetooth (optional)
- ✓ 360° Alarms
- ✓ Lightweight & Rugged
- ✓ Ingress Protection - IP55
- ✓ Alkaline or Rechargeable battery options

### Natural Gas Discrimination

Quickly determines the source of gas leaks, whether it's pipeline gas or naturally occurring biogas; saving valuable time and reducing detection related costs.

### Flexible Configuration

The GS700 can be configured to meet specific application needs and can be customized to suit a range of user requirements, settings and languages.

### Application Ready


Highly configurable to our customers' gas detection needs, providing flexibility of use without compromising on performance.

### APPLICATION MODES:

- ✓ Gas Leak Outdoors
- ✓ Purge
- ✓ Search
- ✓ Barhole
- ✓ Confined Space




The GS700 is a configurable combination instrument that fully meets the needs of gas utilities. The large display simplifies operation and allows the user to access multiple functions.

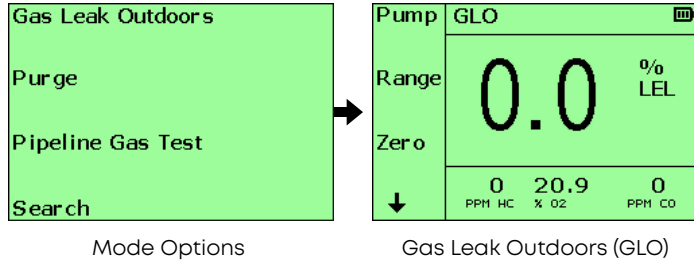

### PIPELINE GAS TEST (PGT)

Is the gas coming from your pipeline? Avoid unnecessary excavations with this invaluable feature. Instantaneous confirmation that the gas is not from your pipeline (e.g. landfill or swamp gas).

Simple user interface:

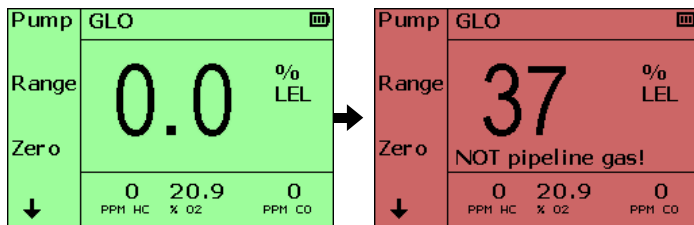

### BARHOLE MODE

Barholing allows underground leaks to be located. The GS700 incorporates a Barhole Mode that allows compliant and consistent barholing.

Features:

- ✓ Fixed time sampling
- ✓ Peak and sustained readings displayed
- ✓ Simple user menu to view previous reading
- ✓ Datalogging - including location data (GPS optional)



### TECHNICAL SPECIFICATIONS

Size:	7.5 x 3.6 x 4.2 inches
Weight:	3.1 lbs (Alkaline) 2.9 lbs (Rechargeable)
Display:	Monochrome LCD with automatic back lighting
Temperature:	-4°F to +122°F (-20°C to +50°C)
Humidity:	0 - 90% RH non-condensing
Sampling:	Integral pump with flow fail sensor; sample path is protected by a hydrophobic and cotton filter
Alarms:	360° Highly visible flashing LED Sounder ~90 dB at 0.3 m
Datalogging:	Capacity: 500 session logs Session log: user ID, date & time, gas readings, alarms, calibration/bump test data, barhole data, PGT logs <ul style="list-style-type: none"> <li>• Log extraction: Infrared or Bluetooth (optional)</li> <li>• Location data via GPS (optional)</li> </ul>
Battery:	3 x LR20 'D' size Alkaline Cells or Rechargeable Battery Pack
Battery Life:	Typically 15 hrs Alkaline, 20 hrs Rechargeable
Charge Time:	Typically 6 hrs
Construction:	Anti-static Polycarbonate ABS with conductive TPE over-molding
Rating:	IP55 (Protected from dust & water jets)
Certification:	IECEX / ATEX   II 2G (Ta = -20°C to +50°C) Ex db ia IIC T4 Gb or Ex db ia IIB T3 Gb (when fitted with a PPM gas sensor) CSA Class I Div. 1 Groups A, B, C, D T4 or Class I Div. 1 Groups C, D T3 (when fitted with a PPM gas sensor)
Warranty:	2 years

### SENSOR SPECIFICATIONS

GAS	RANGE	RESOLUTION	T90	SENSOR TYPE
HC	0-1,000ppm 0-10,000ppm	1ppm 1ppm	-	Semiconductor Semiconductor
HC	0-9.9% LEL 10-100% LEL	0.1% 1%	<6s	Infrared
HC	0-100% Volume	1%	<6s	Infrared
O <sub>2</sub>	0-20.9% 21-25%	0.1% 1%	<15s	Electrochemical
CO	0-1,000ppm	1ppm	<7s	Electrochemical
H <sub>2</sub> S	0-100ppm	1ppm	-	Electrochemical
PGT	Decision made if sample: 1.5% VOL gas			Infrared

\*Instrument without probe T90 response times.

Complies to standards: BS EN / IEC 60079-29-1, BS EN 45544, BS EN 50104

9030 Monroe Road, Houston TX 77061

713-844-1300

[www.heathus.com](http://www.heathus.com)

[info@heathus.com](mailto:info@heathus.com)

Heath Consultants Incorporated operates under a continual product improvement program and reserves the right to make improvements and/or modifications without prior notification.